



環保節能



省電省錢



匠心品質



健康舒適

🔍 產品特色

超高光效(170 lm/W)
超低功率(15W)
超低眩光(UGR<16)
無頻閃
無藍光危害

🔍 完善的服務

客製化
售前模擬規劃
免費樣燈試裝
專業安裝
保固維修

🔍 節能省電高達 **85%**



冠大平板燈
1,000 盞



省下
306,000 度電/年
*每天工作 12 小時 x 300 天




省下
1,377,000 元/年
*4.5 元/度



二氧化碳排放減少
194,616 公斤/年
*相當於種 2600 棵樹

AREX

冠大照明

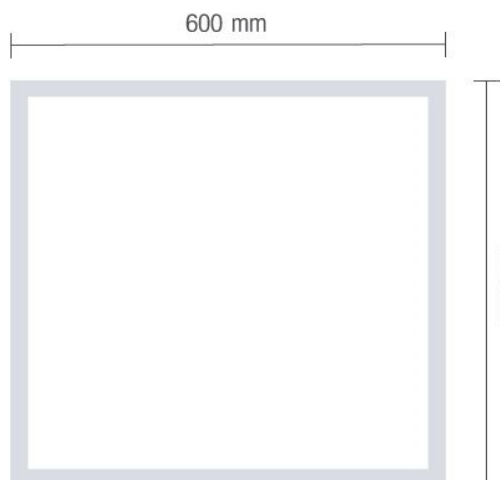

6060系列

適用場所：辦公室/室內空間...

型號	DCL6060-2000DP	DCL6060-2000	DCL6060-2000FF	DCL6060-2000 (P)	DCL6060-2000 (T)	EPL6060
光通量	2200 lm	2600 lm	2700 lm	2800 lm	2840 lm	2800 lm
發光效率	135 lm/W	130 lm/W	135 lm/W	140 lm/W	142 lm/W	140 lm/W
色溫	5700K (3000K / 4000K / 5000K)					
照度@2M	200 Lux	230 Lux	235 Lux	250 Lux	250 Lux	
演色性	80 (90)					
輸入電源	100-240 VAC / 50-60Hz (選配277V)					
消耗功率	16W	20W	20W	20W	20W	20W
燈具尺寸(LxWxH)	600x600x54mm					

型號	DCL6060-2000(H2)	DCL6060-3000DP	DCL6060-3000	DCL6060-3000 (P)	DCL6060-3000 YL	DCL6060-3000HDC
光通量	2800~3200 lm	3200 lm	3600 lm	3450 lm	2700 lm	4600 lm
發光效率	140~160 lm/W	130 lm/W	120 lm/W	115 lm/W	90 lm/W	140 lm/W
色溫	3000K~5700K	5700K (3000K / 4000K / 5000K)			2000K	4000K
照度@2M	230~280 Lux	280 Lux	310 Lux	305 Lux	220 Lux	410 Lux
演色性	80 (90)					
輸入電源	100-240 VAC / 50-60Hz (選配277V)					DC 380V
消耗功率	20W	25W	30W	30W	30W	33W
燈具尺寸(LxWxH)	600x600x54mm					

AREX

冠大照明





12020系列

適用場所：停車場/走道/樓梯間/無輕鋼架空間...

型號	DCL12020-2000DP	DCL12020-2000	DCL12020-3000	EPL12020
光通量	2100 lm	3000 lm	4000 lm	4200 lm
發光效率	130 lm/W	120 lm/W	115 lm/W	140 lm/W
色溫	5700K (3000K / 4000K / 5000K)			
照度@2M	180 Lux	260 Lux	350 Lux	
演色性	80 (90)			
輸入電源	100-240 VAC / 50-60Hz (選配277V)			100-240 VAC
消耗功率	16W	25W	35W	30W
燈具尺寸(LxWxH)	1210x200x54mm			1200x200x35mm

AREX



冠大照明

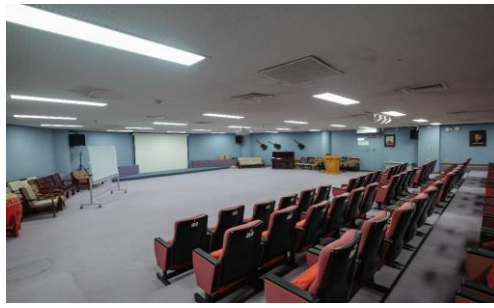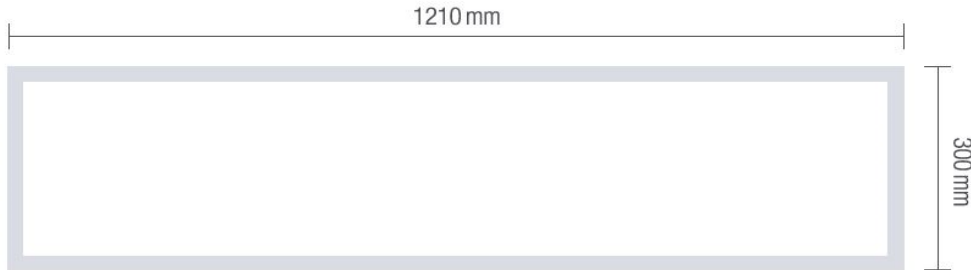

12030系列

適用場所：商場/大廳...


型號	DCL12030-2000DP	DCL12030-2000(H1)	DCL12030-2000	DCL12030-3000	EPL12030
光通量	2200 lm	3200 lm	3200 lm	4200 lm	4200 lm
發光效率	135 lm/W	160 lm/W	130 lm/W	120 lm/W	140 lm/W
色溫	5700K (3000K / 4000K / 5000K)				
照度@2M	200 Lux	280 Lux	280 Lux	370 Lux	
演色性	80 (90)				
輸入電源	100-240 VAC / 50-60Hz (選配277V)				100-240 VAC
消耗功率	16W	20W	25W	35W	30W
燈具尺寸(LxWxH)	1210x300x54mm				1200x300x35mm

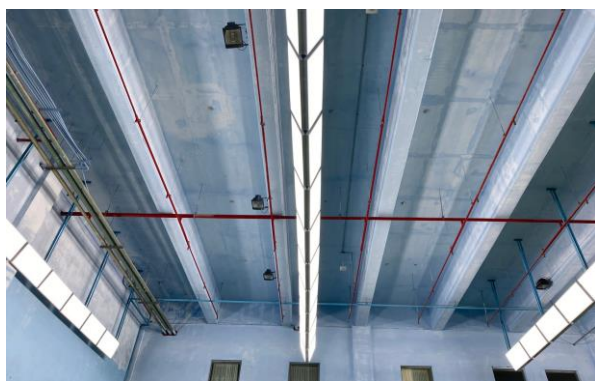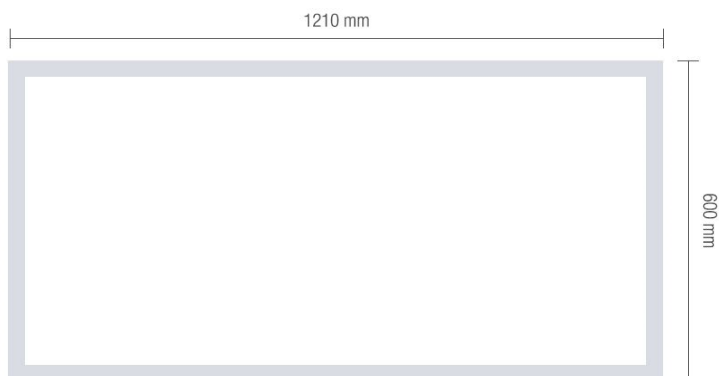


12060系列

適用場所：辦公室/商場...


型號	DCL12060-3000	DCL12060-3000(H)	DCL12060-4500	DCL12060-6000	EPL12060
光通量	4000 lm	4800 lm	5200 lm	7200 lm	8400 lm
發光效率	140 lm/W	160 lm/W	130 lm/W	120 lm/W	140 lm/W
色溫	5700K (3000K / 4000K / 5000K)				
照度@2M	350 Lux	400 Lux	450 Lux	640 Lux	
演色性	80 (90)				
輸入電源	100-240 VAC / 50-60Hz (選配277V)				100-240 VAC
消耗功率	28W	30W	40W	60W	60W
燈具尺寸(LxWxH)	1210x600x54mm				1200x600x35mm




4 寸




5 寸



6 寸



7 寸




8 寸

DDL2筒燈系列

適用場所：走道/商場辦公室/...

型號	尺寸	筒身 (Φ x h)	開孔尺寸 (Φ x mm)	色溫 (K)
DDL2-4	4 吋	123(外框) / 97(內徑) x 50 mm	110 mm	5700K (3000K / 4000K)
DDL2-5	5 吋	160(外框) / 117(內徑) x 50 mm	130 mm	
DDL2-6	6 吋	180(外框) / 136(內徑) x 51 mm	150 mm	
DDL2-7	7 吋	200(外框) / 148(內徑) x 69 mm	170 mm	
DDL2-8	8 吋	255(外框) / 192(內徑) x 74 mm	230 mm	
DDL2-8L	8 吋	280(外框) / 192(內徑) x 74 mm	250 mm	

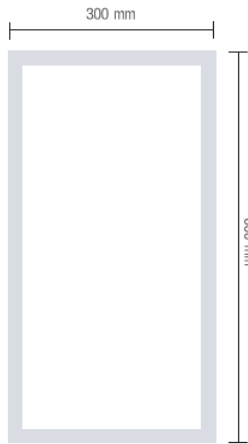

特殊尺寸燈具

適用場所：走道/樓梯間/小空間...

型號	DCL11757-4500	DCL6020-1600	DCL6020-2000	DCL6030-1600	DCL6030-2000
光通量	5200 lm	1800 lm	2200 lm	1800 lm	2000 lm
發光效率	130 lm/W	110 lm/W	110 lm/W	110 lm/W	110 lm/W
色溫	5700K (3000K / 4000K / 5000K)			2000K	
照度@2M	450 Lux	160 Lux	200 Lux	160 Lux	180 Lux
演色性	80				
輸入電源	100-240 VAC / 50-60Hz (選配277V)				
消耗功率	40W	16W	20W	16W	20W
燈具尺寸(LxWxH)	1170x570x54mm	600x200x54mm		600x300x54mm	



三防燈具

適用場所：無塵室周邊管道間/走廊/冰水機室...

型號	AWP6010-1200	AWP6010-1500	AWP12010-2000	AWP12010-3000	AWP12010-4000
光通量	1400 lm	1700 lm	2500 lm	3400 lm	4500 lm
發光效率	115 lm/W	115 lm/W	125 lm/W	115 lm/W	110 lm/W
色溫	5700K (3000K / 4000K / 5000K)				
照度@2M	110 Lux	120 Lux	180 Lux	250 Lux	330 Lux
演色性	80				
輸入電源	100-277 VAC / 50-60Hz				
消耗功率	12W	15W	20W	30W	40W
燈具尺寸(LxWxH)	600x105x78mm		1200x105x78mm		



型號	AWP12010-2000YL(黃光)	AWP12010-3000YL(黃光)	AWP12010-4000YL(黃光)
光通量	1700 lm	2300 lm	2800 lm
發光效率	85 lm/W	75 lm/W	70 lm/W
色溫	2000K		
照度@2M	120 Lux	160 Lux	210 Lux
濾光波長	<520nm		
輸入電源	100-277 VAC / 50-60Hz		
消耗功率	20W	30W	40W
燈具尺寸(LxWxH)	1200x105x78mm		



淚滴型LED燈具

適用場所：無塵室/潔淨室...吸頂安裝

型號	DCL12007-2000	DCL12007-3000	DCL12007-2000YL(黃光)	DCL12007-3000YL(黃光)
光通量	2200 lm	3300 lm	2000 lm	2700 lm
發光效率	110 lm/W	110 lm/W	100 lm/W	90 lm/W
色溫	5700K (3000K / 4000K / 5000K)		2000K	
照度@2M	150 Lux	240 Lux	100 Lux	180 Lux
濾光波長	x		<520nm	
輸入電源	100-240 VAC / 50-60Hz (選配277V)			
消耗功率	20W	30W	20W	30W
燈具尺寸(LxWxH)	1250x80x52 mm			

長條型LED平板燈

適用場所：走道/樓梯間/線槽...

型號	DCL6009-800	DCL6009-1200	DCL12009-1600	DCL12009-2000
光通量	720 lm	1100 lm	1600 lm	2000 lm
發光效率	90 lm/W	90 lm/W	100 lm/W	100 lm/W
色溫	5700K (3000K / 4000K / 5000K)		2000K	
照度@2M	60 Lux	90 Lux	140 Lux	180 Lux
演色性	80			
輸入電源	100-240 VAC / 50-60Hz (選配277V)			
消耗功率	8W	12W	16W	20W
燈具尺寸(LxWxH)	600x90x53.2 mm		120x90x53.2 mm	


AREX

冠大照明




DCL12008系列 適用場所：停車場/走道/樓梯間...

型號	DCL12008-1500	DCL12008-2000
光通量	1800 lm	2200 lm
發光效率	120 lm/W	120 lm/W
色溫	5700K (3000K / 4000K / 5000K)	
照度@2M	170 Lux	200 Lux
演色性	80	
輸入電源	100-277 VAC / 50-60Hz	
消耗功率	15W	20W
燈具尺寸(LxWxH)	1214x75.8x39.5 mm	

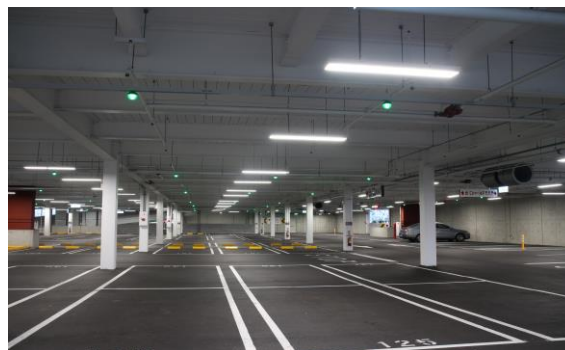

DCL12008微波系列

型號	DCL12008-1500MW	DCL12008-2000MW
光通量	2000 lm	2200 lm
發光效率	130 lm/W	120 lm/W
色溫	5700K (3000K / 4000K / 5000K)	
照度@2M	180 Lux	200 Lux
演色性	80	
輸入電源	100-277 VAC / 50-60Hz	
消耗功率	15W	20W
燈具尺寸(LxWxH)	1214x75.8x39.5 mm	
調光比例	30%-100%	

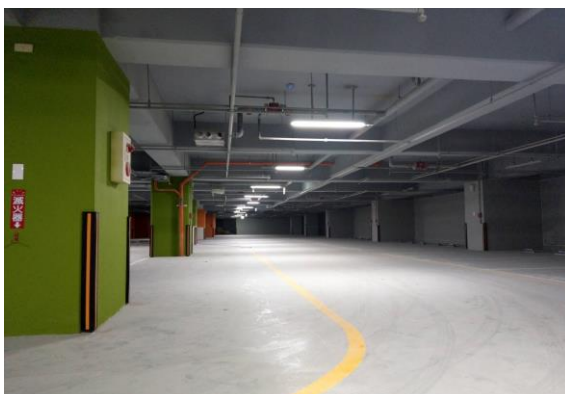

AREX

冠大照明



教室黑板燈

適用場所：教室/會議室/黑板/畫廊...

型號	ACL12019	ABL12010-4000
光通量	3800 lm	3500 lm
發光效率	100 lm/W	90 lm/W
色溫	5000K (5700K)	5000K (5700K)
照度@2M	450 Lux	630 Lux
演色性	80 (90)	80 (90)
輸入電源	100-240 VAC / 50-60Hz (選配277V)	100-240 VAC / 50-60Hz (選配277V)
消耗功率	40 W	40 W
燈具尺寸(LxWxH)	1210x190x60 mm	1210x100x64 mm



北區展銷中心

地址：新北市汐止區大同路一段308號4樓

電話：02-26496020

傳真：02-26496021

中區展銷中心

地址：台中市西屯區何南路一段170號6樓之3

電話：04-2315-7909

傳真：04-2315-7907